

AD LOC 100

Industrial/Commercial Application

ADVANCED PANEL PRODUCTS LTD.

Our AD LOC 100 panel can be used for industrial or commercial applications. It is fully thermally broken and has flanges internally and externally.

Panels come in 36" widths which expedite install times. (An intermediate fastener may be required). An array of uses are possible wherever you require strength and insulation in a building. (potato sheds, office buildings, commercial structures, small buildings). A hidden fastener is also available for commercial applications.

Mesa profile with or without stucco embossing is available.

Panel Gauge:

- 26 ga. Exterior; Others Available
- 26 ga. Interior (Refrig. White) ;
Others Available

Panel Thickness:

- 1 1/2", 2 1/2", 3" and 4"

Standard Colors:

- QC317, QC315, QC321,
(Ext. Only)
(Optional Colors Available)

Options:

- Aluminum Stucco Embossing
- ULC 502


Polyurethane Foam:

- PF-6358-0
- Closed Cell Content: ASTM D-
2856
- Thermal Conductivity: ASTM C-
518

- Fire Rating: CAN/ULC S-101
CAN/ULC S-102
CAN/ULC S-127

- Absorption Testing: ASTM D-
2842

- Finished Panel Width: 36"
(CFIA Approved)

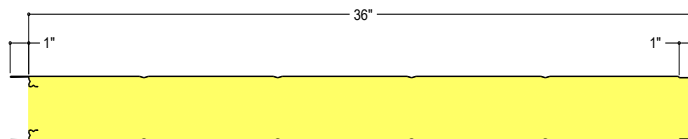

ADVANCED PANEL PRODUCTS LTD.



3955 — 8 Street
Nisku, Alberta
T9E 8M1
Canada

Phone: 780-955-6363
Fax: 780-955-6377
Email: www.advancedpanel.com